T06080"98752660

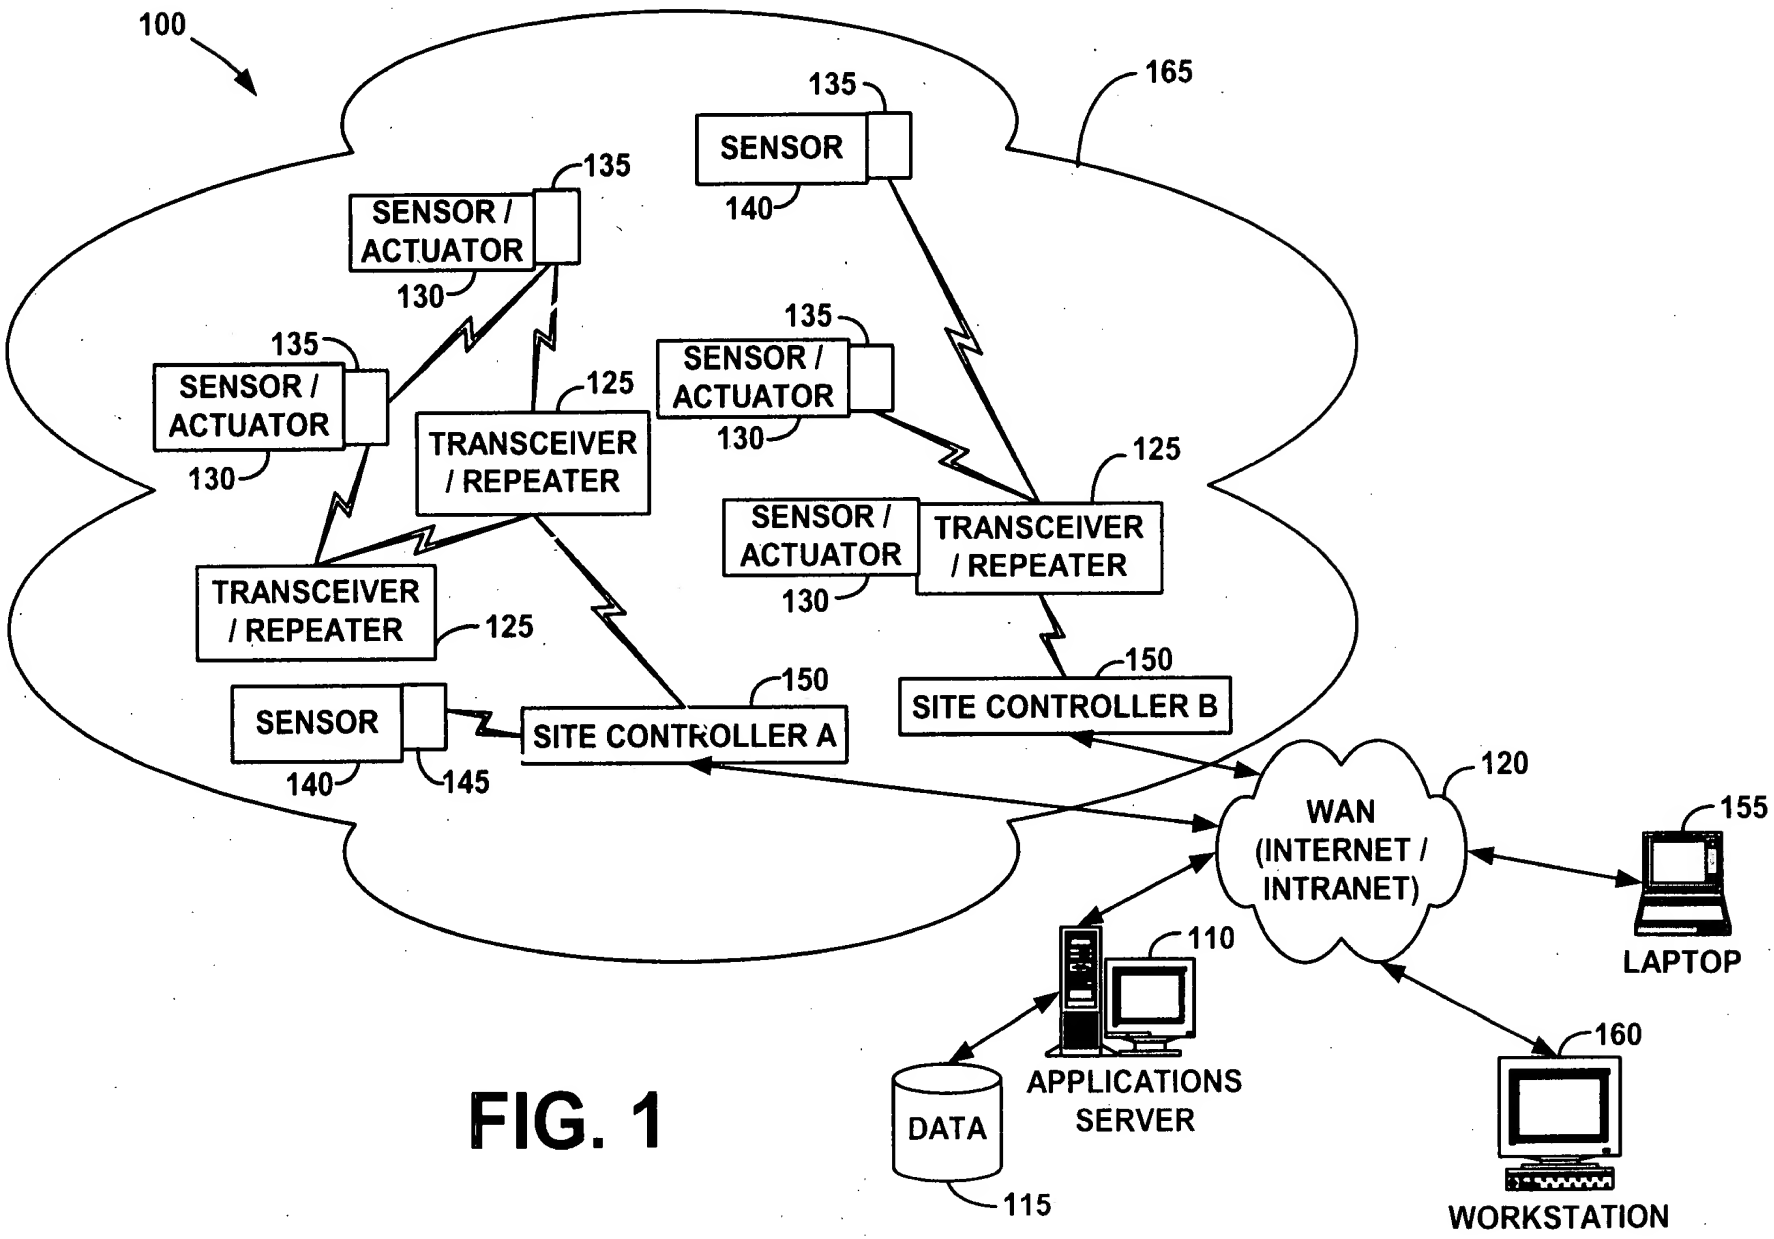

FIG. 1

Patent Application Publication

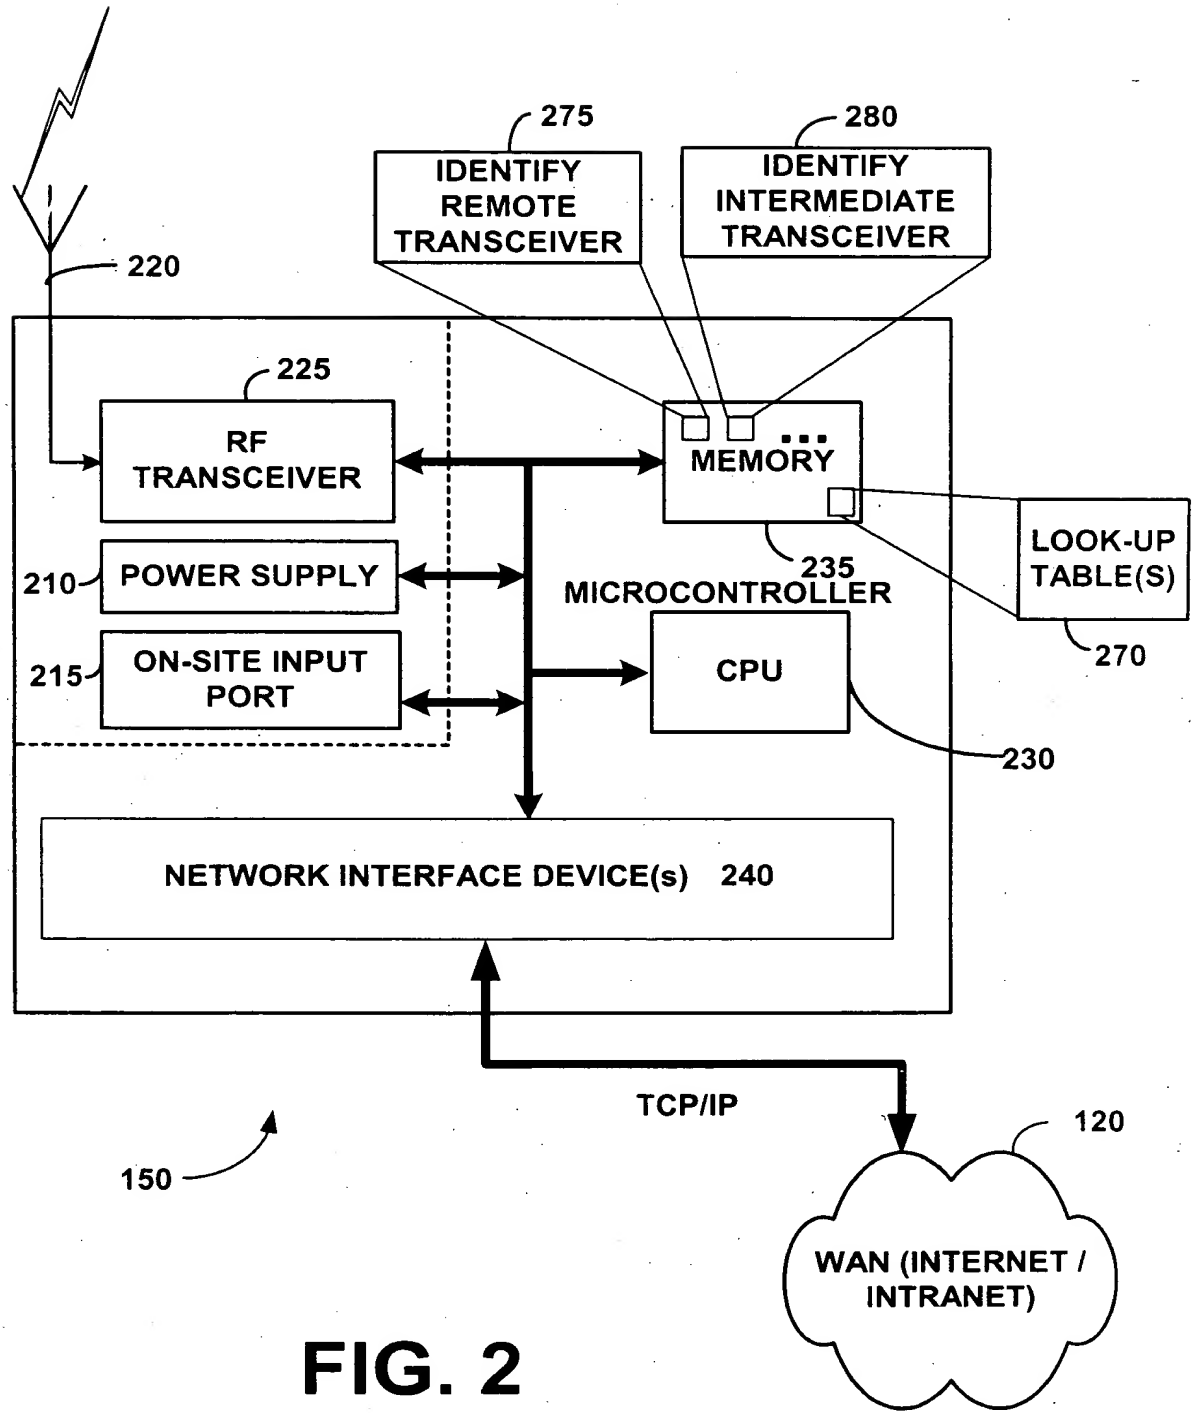

FIG. 2

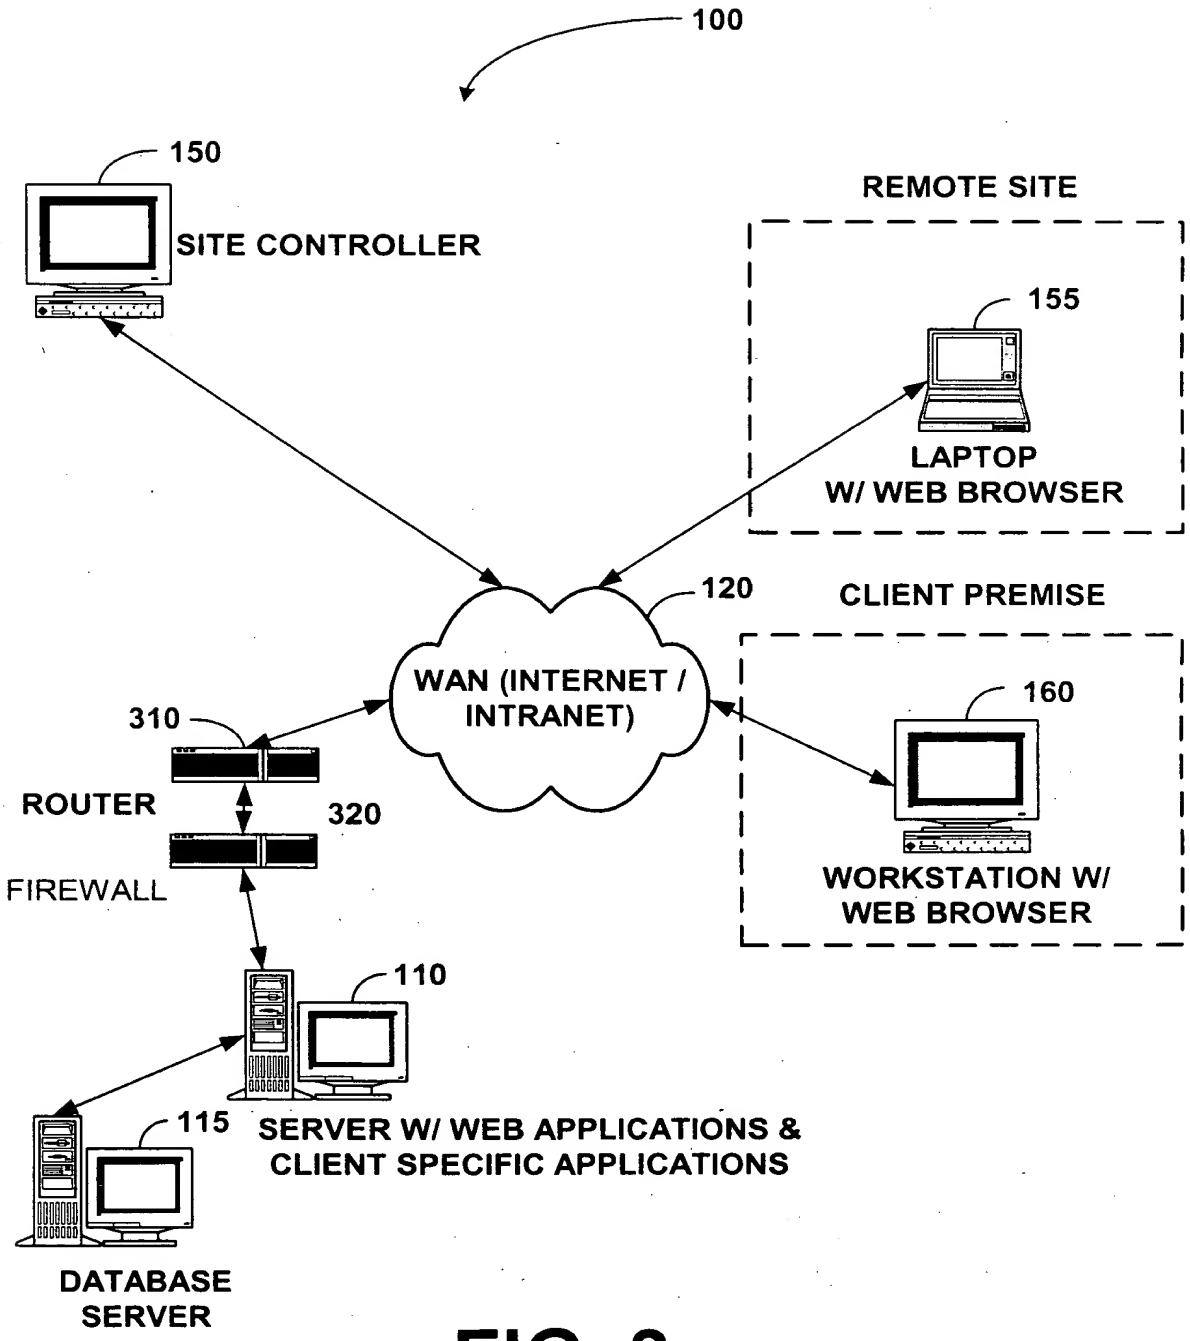
100
150
SITE CONTROLLER
REMOTE SITE
155
LAPTOP
W/ WEB BROWSER
120
CLIENT PREMISE
WAN (INTERNET /
INTRANET)
160
310
ROUTER
320
FIREWALL
WORKSTATION W/
WEB BROWSER
110
115
SERVER W/ WEB APPLICATIONS &
CLIENT SPECIFIC APPLICATIONS
DATABASE
SERVER

FIG. 3

FIG. 4 Message Structure

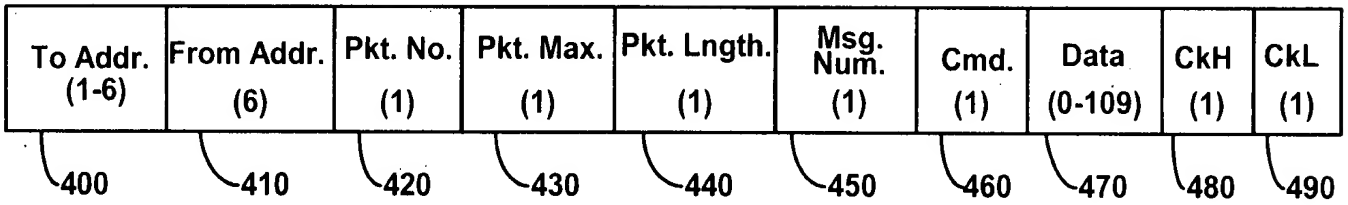

5,956,487 - 09/21/99

"To Address"	Byte Assignment:
MSB - Byte 1 Device Type	FF-F0 (16) - Broadcast All Devices (1 Byte Address) EF-1F (224) - Device Type Base (2 to 6 Byte Address) 0F-00 (16) - Personal Transceiver Identification (6 Byte Address)
Byte 2 Mfg./Owner ID	FF-F0 (16) - Broadcast all Devices (Byte 1 Type) (2 Byte Broadcast Address) EF-00 (240) - Mfg./Owner Code Identification Number
Byte 3 Mfg./Owner Extension ID	FF-F0 (16) - Broadcast all Devices (Byte 1 & Byte 2 Type) (3 Byte Broadcast Address) EF-00 (240) - Device Type/Mfg./Owner Code ID Number
Byte 4	FF-F0 (16) - Broadcast all Devices (Byte 1 & Byte 2 Type) (4 Byte Broadcast Address) EF-00 (240) - ID Number
Byte 5	(FF-00) 256 - Identification Number
Byte 6	(FF-00) 256 - Identification Number

FIG. 5

Sample Messages

Central Server to Personal Transceiver - Broadcast Message - FF (Emergency)

Byte Count = 12

600

To Addr. (FF)	From Addr. (12345678)	Pkt. No. (00)	Pkt. Max. (00)	Pkt. Lngth. (0C)	Cmd. (FF)	CkH (02)	CkL (9E)

First Transceiver to Repeater (Transceiver)
Broadcast Message - FF (Emergency)

Byte Count = 17

602

To Addr. (F0)	From Addr. (12345678)	Pkt. No. (00)	Pkt. Max. (00)	Pkt. Lngth. (11)	Cmd. (FF)		CkH (03)	CkL (A0)

Data (A000123456)

Note: Additional Transceiver Re-Broadcasts do not change the message.
The messages are simply received and re-broadcast.

Message to Device "A0" From Device "E1" Command - "08" (Respond to PING)
Response will reverse "To" and "From" Addresses

604

Byte Count = 17

To Addr. (A012345678)	From Addr. (E112345678)	P # (00)	P Max. (00)	P Lngth. (11)	Cmd. (08)	Data (A5)	CkH (04)	CkL (67)

FIG. 6

Tesla, Ex. 1008, p. 0025 of 0060

T06080"98752660

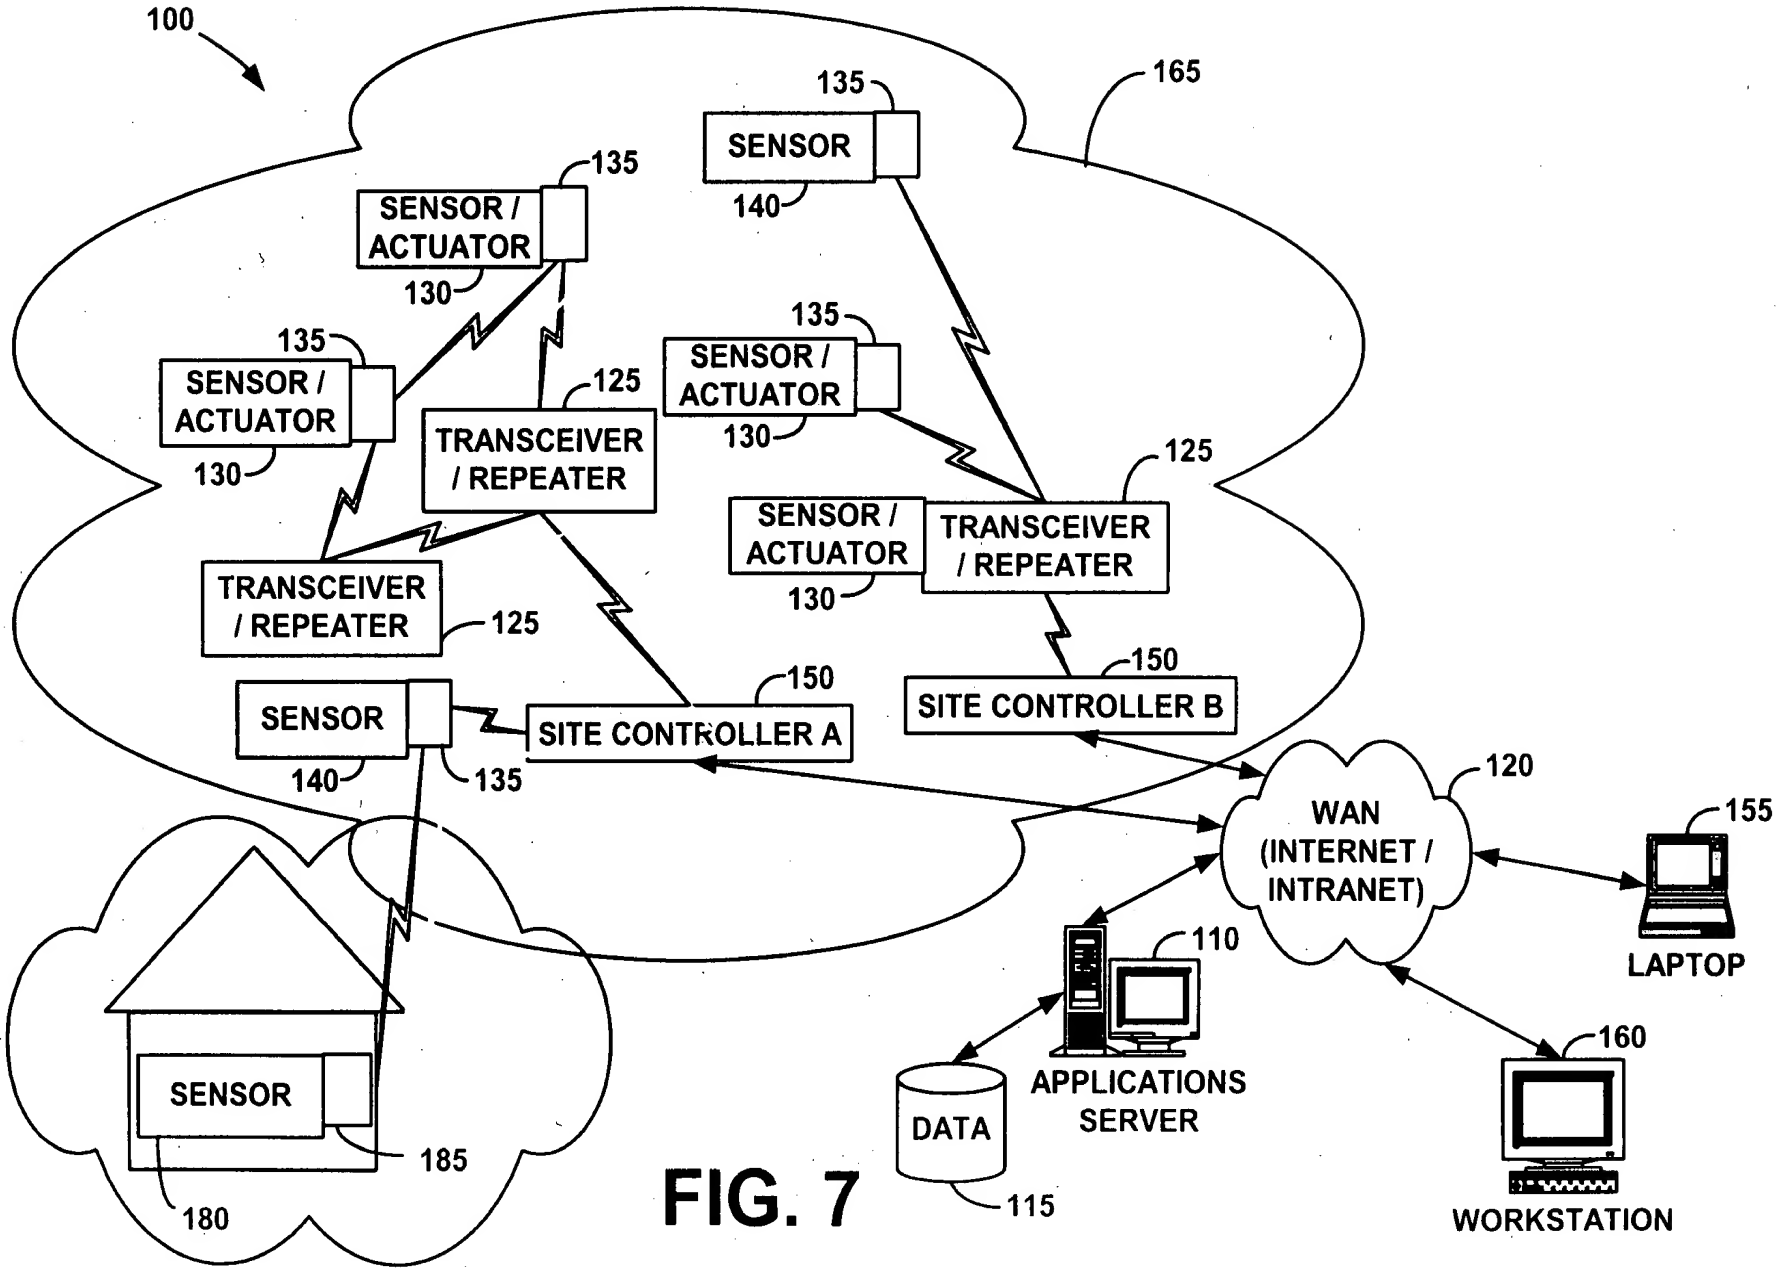

FIG. 7